

RIT Series 3 pin Inductors




FEATURES

- 3 Pin radial inductor
- Contain high-frequency ferrite
- Comparatively large rate current.

APPLICATIONS

- TVs and Audio equipment and Switching power supplies.
- Buzzers and Alarm systems
- Notebook computer, DC - DC converters and air-conditions, etc
- other oscillation circuits

SHAPE AND DIMENSIONS

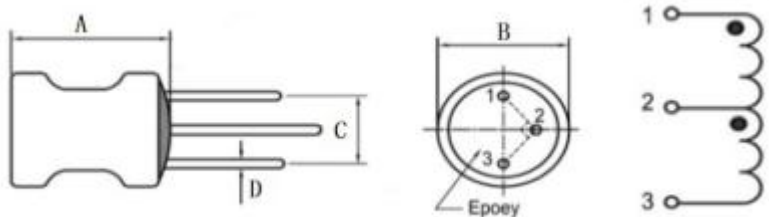

Part Number	Dimensions (mm)			
	ΦA(MAX)	BMAX)	C(MAX)	D
RIT0608	11.0	7.5	3.0±0.5	0.65±0.1
RTI0810	13.5	9.5	4.0±0.5	0.65±0.1
RIT0912	15.0	10.5	5.0±0.5	0.65±0.1
RIT1012	16.0	11.5	6.0±0.5	0.80±0.1
RIT1016	20.0	12.0	6.0±0.5	0.80±0.1

PRODUCT IDENTIFICATION

RIT 0810 - 4R7 M

① ② ③ ④

- ① 3 pin inductor Series name
- ② Dimensions D×L
- ③ Radial Inductance: R47-0.47uH 4R7-4.7uH 470-47uH
- ④ Tolerance: K: ±10% M: ±20%

Remark: Design as Customer's request specification.